
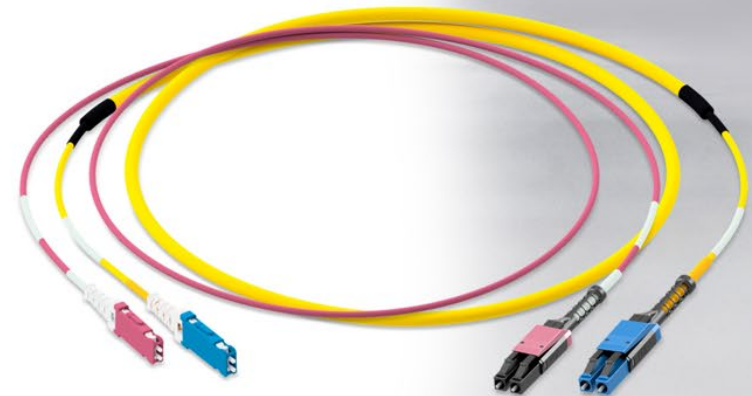


## SN<sup>®</sup> (SAC) Patchcords

### PRODUCT INFORMATION

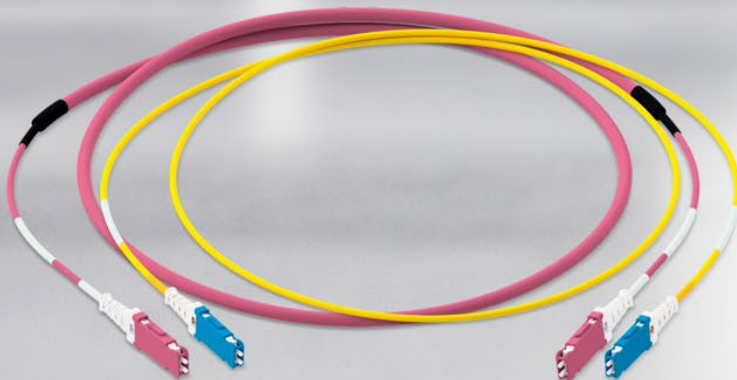

**SN® (SAC) Patchcords solution is available in two end face quality features: BASIC and PURE**

**Define the end-face quality according to your application requirements:**



**Quality feature BASIC** is our well-proven, high-grade, standards compliant product in terms of end-face geometry, defect, and cleanliness, providing excellent IL and RL performance:

- The PreCONNECT® factory-assembled plug & play system enables quick and reliable, cost efficient, installation and performance
- Harmonized modular components of the quality feature BASIC solution ensure end to end performance of the entire channel



**Quality feature PURE** is the enhanced version of our quality feature BASIC, but with more stringent defect and cleanliness screening and factory sealed, tamper evident adapter-interfaces.

- Guaranteed protection of the polished connector end-face against contamination and damage through sealed adapter-interfaces, enabling time savings during initial installation and commissioning due to the elimination of the need for cleaning and testing\*/\*\*.
- Quality feature PURE provides an industry leading low random mate insertion and return loss (mean) which enables up to six (6) mated pairs in a 10G/OM4 application up to 300m.

**Part numbers:**

**Quality feature BASIC:** The part numbers XXXAXXXX listed in this document are valid for the BASIC quality feature.

**Quality feature PURE:** Add a “P” to the end of the quality feature BASIC part number (*Example: XXXAXXXXP*)

***(Note: PURE trunk cables have factory attached sealed coupling adapters incorporated and thus utilize empty patch panels and enclosures)***

*\* While Rosenberger does not require permanent link or channel testing for warranty registration of PURE installations due to guaranteed performance, certain customers will require testing documentation for their records.*

*\*\* Only applicable when all components are of quality feature PURE and installed by trained PURE installers.*

## Applications:

For stationary and weather protected application acc. to IEC 60721-3-3, like within data centers and buildings.

## Properties:

- 2 fiber round cables, single and double jacket, different diameters
- Bending behavior of the round cables equal in all directions
- Bend-insensitive fibers
- With FRNC-LSZH and OFNP (Plenum) cable jackets, OFNR (Riser) on request
- Polarity:
  - Full-duplex cables with duplex connectors on both sides “crossed” A to B in accordance with ISO/IEC 11801 and EN 50173
  - Polarity changeable if needed
- Operating temperature range climate class C „indoor, controlled environment“ acc. to IEC 60753-1, -10°C to +60°C
- Connector, fiber and cable data on request via the product profiles of the patchcords

## Length tolerances:


- Up to 1 m = - 50 mm
- 2 m to 3 m = - 100 mm
- 4 m to 25 m = - 200 mm
- Longer than 25 m = - 1 %

## Delivery form:

- Attenuation (IL) measured in accordance with IEC 61300-3-4 „C“ or „Substitution“ method, MM 850nm/SM 1310nm, measurement values on request, or can be downloaded from our website by using the serial numbers of the patchcords <https://www.rosenberger.com/products/download-measurement-data/>
- Serial number labels with length information at both patchcord ends
- Individually packaged in foil bags with product ID label

## Your benefits at a glance:

- The perfect fitting cable diameter for each application available
- Installed patchcords can be clearly identified by their serial number labels with length information at both patchcord ends
- Patchcords can be loaded with their serial number into your network documentation

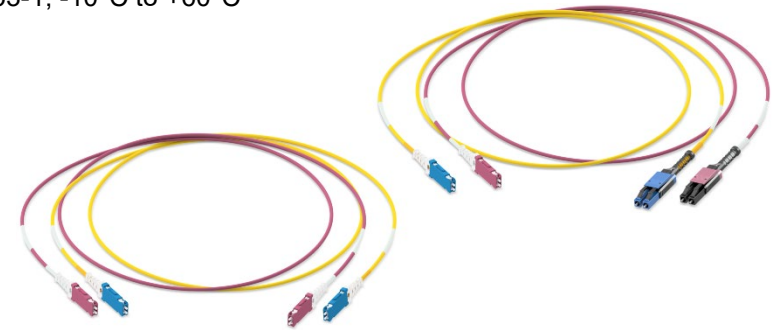

**SN® (SAC) connector:**


The SN® (Senko Nano) is a genuine Push-Pull-Boot duplex plug connector manufactured using 1.25-mm full-ceramic ferrule technology. It belongs to the category of Very Small Form Factor (VSFF) plug connectors.

The connector has been by Senko as an optical interface plug connector for SFP-DD, OSFP and QSFP-DD transceivers and various other applications and is available as singlemode and multimode version, PC 0° and APC 8° polished. The SN® is standardized in IEC 61754-36, in which he is called SAC.


Our SN® Patchcords are assembled with the second SN® model, the SN® EZ-Flip. Its A/B polarity is easy and secure, toolless changeable. The A/B polarity of the first SN® model is not changeable.

The SN® connector allows users to increase the port density per 19" height unit (HU) in datacenter optical fiber cabling infrastructures beyond the with LC Duplex maximum possible number while still permitting patching with no equipment other than the user's fingers.



**SN® EZ-Flip**

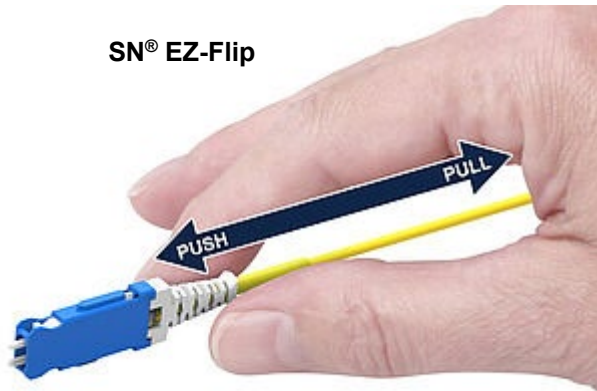

A/B polarity easy and secure, toolless changeable, source [www.senko.com](http://www.senko.com)

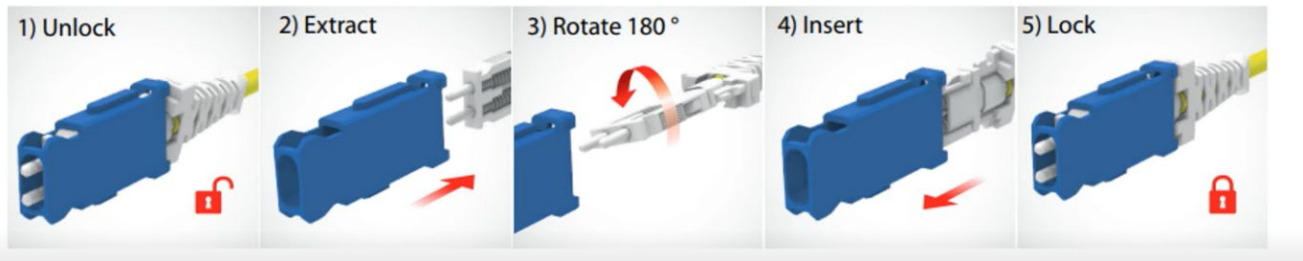

**LC COMPACT Push-Pull-Boot (LCC-PPB)**

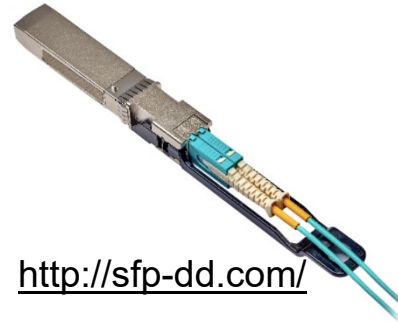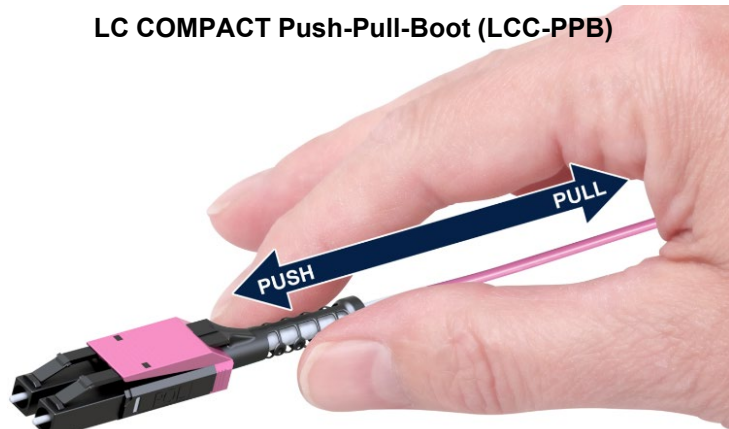


<http://sfp-dd.com/>



<https://osfpmsa.org/>

<http://www.qsfp-dd.com/>

**SN® single jacket patchcords FRNC-LSZH:**

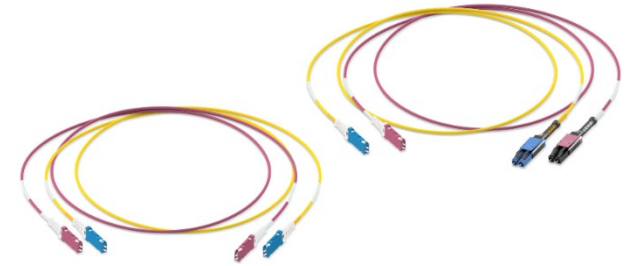



<b>Part numbers with single jacket cable I-V(ZN)H FRNC-LSZH</b>			
<b>Add your desired length in millimeter to the part number, e.g. 2.0 meter: 093A0001G657A1-2000</b>			
<b>Deliverable lengths: From 30cm up to 999 meter, in 10cm increments</b>			
<b>Cable diameter</b>	<b>Connectors</b>	<b>OM4</b>	<b>OS2</b>
1.6 mm	SN® PC 0° » SN® PC 0°	093A0006OM4	093A0005G657A1
	SN® PC 0° » LCC-PPB PC 0°	093A0008OM4	093A0007G657A1
2.0 mm	SN® PC 0° » SN® PC 0°	093A0002OM4	093A0001G657A1
	SN® PC 0° » LCC-PPB PC 0°	093A0004OM4	093A0003G657A1

Technical data of connectors, fibers and cables on request via the product profile of your selected patchcords.

<b>Technical data single jacket cable I-V(ZN)H FRNC-LSZH</b>					
<b>Cable diameter</b>	<b>Kink resistance loop diameter</b>	<b>Max. tensile force short term [N]</b>	<b>Max. crush resistance short term [N/dm]</b>	<b>Weight [kg/km]</b>	<b>Fire load [MJ/m]</b>
1.6 mm	7.8 mm	200	150	2.9	0.07
2.0 mm	8.4 mm	300	150	4	0.11

More technical data of the cables on request.

**SN® single jacket patchcords OFNP (Plenum):**

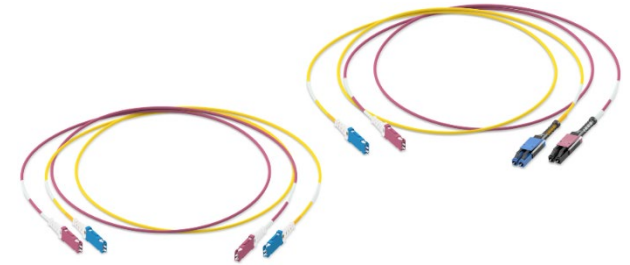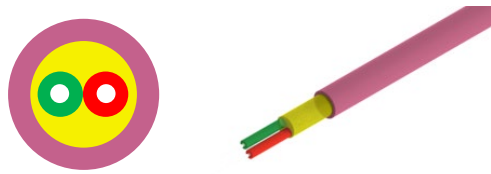

<b>Part numbers with single jacket cable OFNP (Plenum)</b>				
<b>Add your desired length in millimeter to the part number, e.g. 2.0 meter: 093A0001G657A1-2000</b>				
<b>Deliverable lengths: From 30cm up to 999 meter, in 10cm increments</b>				
<b>Cable diameter</b>	<b>Connectors</b>	<b>OM4 violet</b>	<b>OM4 aqua</b>	<b>OS2</b>
1.6 mm	SN® PC 0° » SN® PC 0°	on request	on request	on request
	SN® PC 0° » LCC-PPB PC 0°	on request	on request	on request
2.1 mm	SN® PC 0° » SN® PC 0°	on request	on request	on request
	SN® PC 0° » LCC-PPB PC 0°	on request	on request	on request

Technical data of connectors, fibers and cables on request via the product profile of your selected patchcords.

<b>Technical data single jacket cable OFNP (Plenum)</b>				
<b>Cable diameter</b>	<b>Kink resistance loop diameter</b>	<b>Max. tensile force short term [N]</b>	<b>Max. crush resistance short term [N/dm]</b>	<b>Weight [lbs/Kft]</b>
1.6 mm	7.8 mm	220	3.5	1.790
2.1 mm	8.6 mm	220	3.5	3.096

More technical data of the cables on request.





### SN® double jacket patchcords FRNC-LSZH:

Perfect for „top-of-the-rack“ and raised-floor cabling within data centers !

Mechanical requirements of „top-of-the-rack“ and raised-floor cabling on patchcords are much higher than within racks. Therefor we offer rugged SN® patchcords with 2 fiber round cables with double jacket, with increased kink, crush and tensile resistance.

#### Advantages of double jacket cables:



- Increased kink, crush and tensile resistance of the 4.0mm double jackets in the „top-of-the-rack“ and raised-floor environment
- Low cable volume and good bending behaviour of the 2.0mm thin SN® legs within the patchfield area

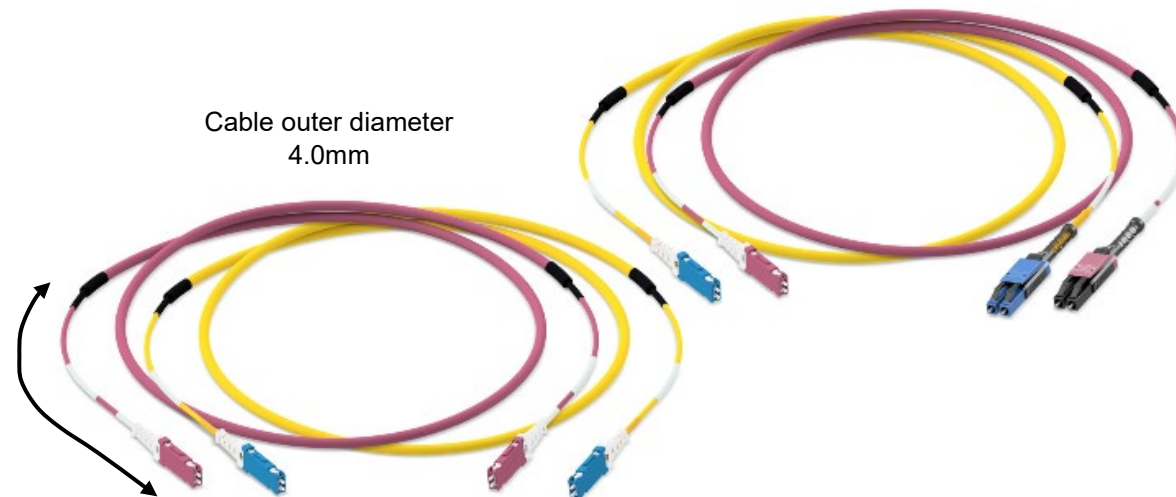

Cable outer diameter  
4.0mm

2.0mm leg length default 50cm,  
on request up to 3m

**SN® double jacket patchcords FRNC-LSZH:**

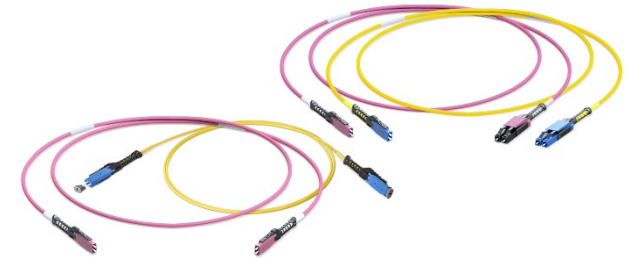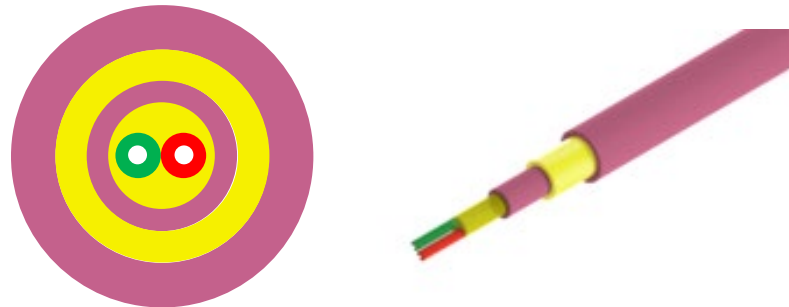

<b>Part numbers with double jacket cable I-V(ZN)H(ZN)H FRNC-LSZH</b>			
<b>Add your desired length in millimeter to the part number, e.g. 2.0 meter: 093A0001G657A1-2000</b>			
<b>Deliverable lengths: From 2 up to 999 meter, in 10cm increments</b>			
<b>Cable diameter</b>	<b>Connectors</b>	<b>OM4</b>	<b>OS2</b>
2.0 / 4.0 mm	SN® PC 0° » SN® PC 0°	on request	on request
	SN® PC 0° » LCC-PPB PC 0°	on request	on request

Technical data of connectors, fibers and cables on request via the product profile of your selected patchcords.

*SN®  
double jacket patchcords  
OFNP (Plenum)  
on request*

<b>Technical data double jacket cable I-V(ZN)H(ZN)H FRNC-LSZH</b>					
<b>Cable diameter</b>	<b>Kink resistance loop diameter</b>	<b>Max. tensile force short term [N]</b>	<b>Max. crush resistance short term [N/dm]</b>	<b>Weight [kg/km]</b>	<b>Fire load [MJ/m]</b>
2.0 / 4.0 mm	< 24.5mm tbt	600	300	2.9	0.07

More technical data of the cables on request.



## About Rosenberger OSI:

Since 1991, Rosenberger Optical Solutions & Infrastructure (Rosenberger OSI) has been a recognized expert for fiber-based connectivity, cabling solutions and infrastructure services in the areas of data centers, local area networks, mobile networks and industrial applications. As an integrated solution provider, we have high expertise in the development and operational excellence in the production of system solutions for communication networks. Our comprehensive services enable the secure and efficient operation of digital infrastructures. This combination, combined with our strong customer focus, makes us unique and a strong partner in the global market.

Rosenberger OSI has been part of the globally operating Rosenberger Group since 1998. The Rosenberger Group is a leading global provider of high-frequency, high-voltage and fiber optic connectivity solutions with headquarters in Germany. For further information, please visit:

[www.rosenberger.com/osi](http://www.rosenberger.com/osi)

# Rosenberger

**Rosenberger-OSI GmbH & Co. OHG**

Optical Solutions & Infrastructure | Endorferstr. 6 | 86167 Augsburg | Telefon: +49 821 24924-0  
info-osi@rosenberger.com | [www.rosenberger.com/osi](http://www.rosenberger.com/osi)

Rosenberger® is a registered trademark of Rosenberger Hochfrequenztechnik GmbH & Co. KG. All rights reserved. © Rosenberger 2022

For technical reasons, we reserve us the right to make any deviations from the illustrations in the product information.  
Transfer to third party only by authority of Rosenberger-OSI GmbH & Co. OHG- All rights reserve.

Creation date: 2023-08-01  
Revision creation date: 2023-08-01  
Revision: 001